




Replace the door handle of the security door

To replace the home door security door handle.

Written By: Z.Heng

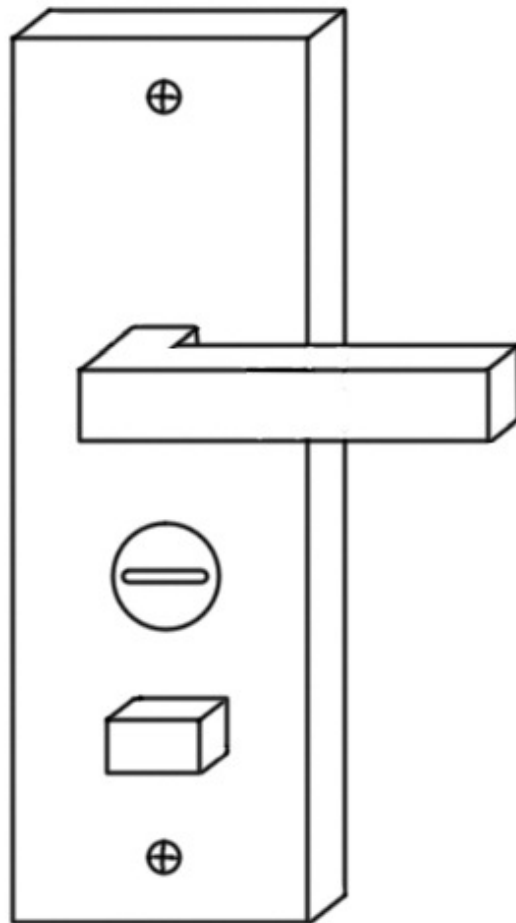


By Z.Heng



TOOLS:


- [Phillips screwdriver](#) (1)
 - [Metal pry bar](#) (1)
-

Step 1 — Remove the screws that secure the handle

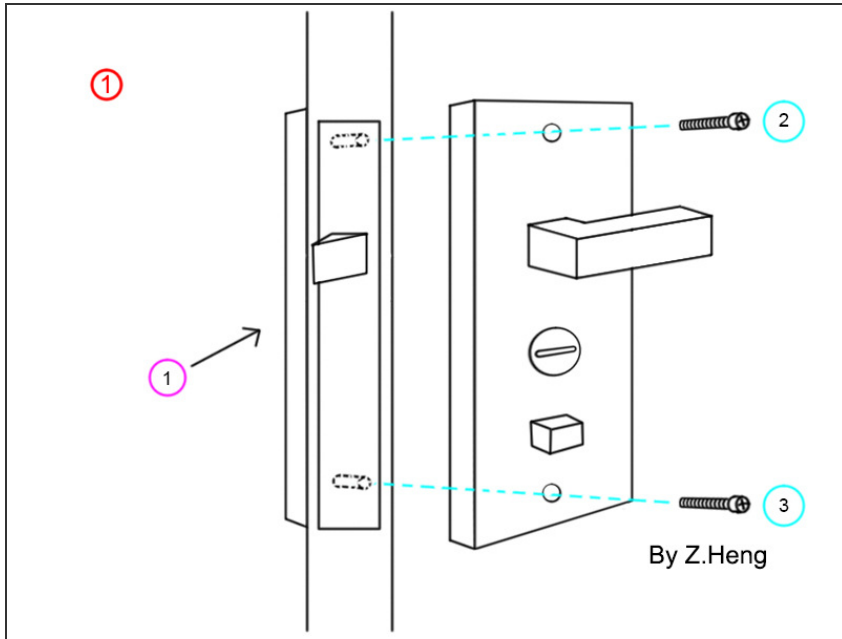


- It is recommended that two people work together, one person in the outer side of the outer handle, one person on the other side of the removal of screws.
- Remove the two screws.


Step 2 — Remove the handle

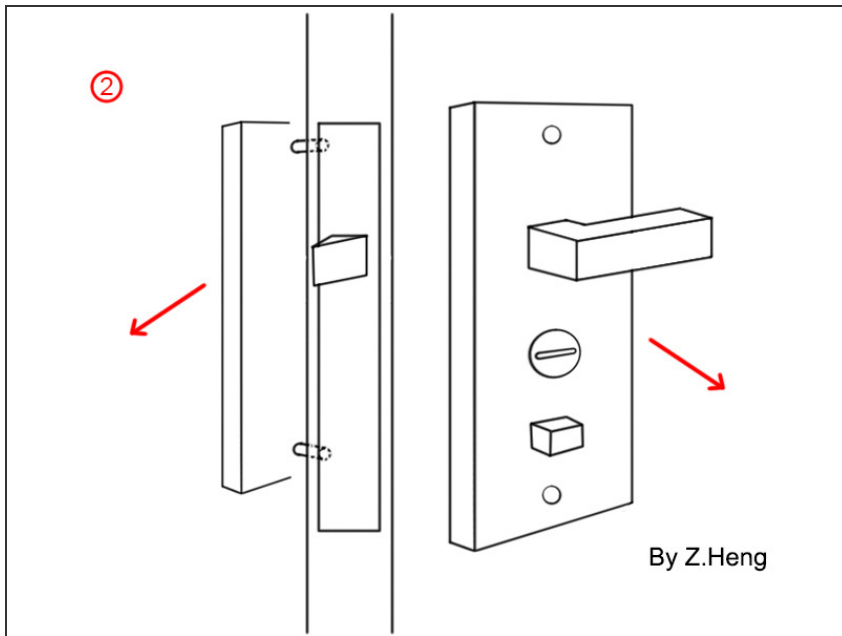

- Use the pry bar to pry around carefully to remove the door handles on both sides.
- ⚠ Usually there will be a plastic gasket between the handle and the door, careful not to damage it.
- ⚠ There will be a metal square shaft between the handles. Remove the inner handle when you are careful not to lose it, because the axis is divided inside and outside.

Step 3 — Note the square axis

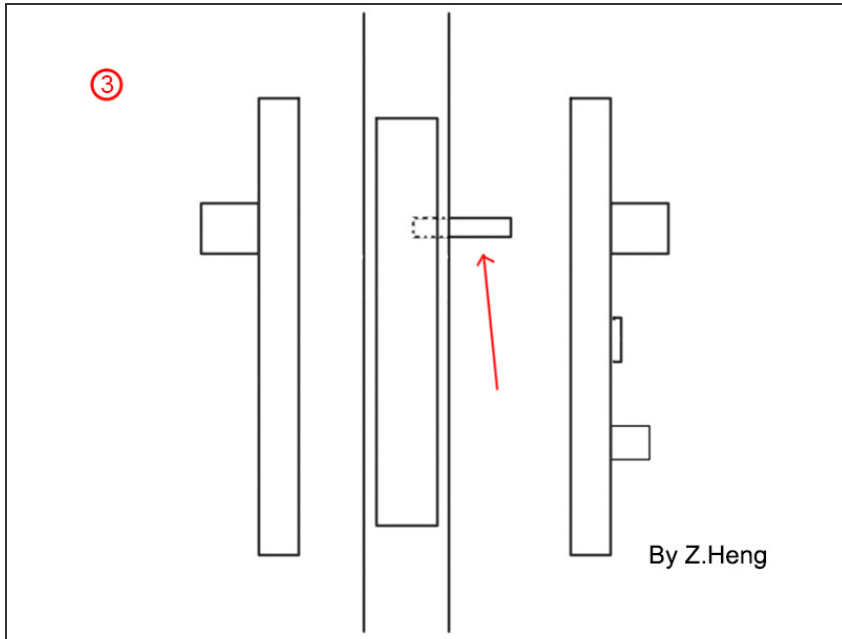

 Note the direction of installation of this square shaft. Do not get rid of the handle when you remove the handle.

按照本步骤相反的顺序重新安装。其实比想象地容易，不是吗？

This document was last generated on 2017-06-19 04:10:42 AM.